

Overview of elements 2023



Ordering Information | Dimensional drawings

Ordering correctly

Necessary Order Information

Complete and accurate data is absolutely necessary for the processing and production of your order, since an accurate and clear order allows us to immediately begin processing your order without time-consuming enquiries.


For this reason, your order must contain the following information:

- · Range name and front number
- Handle number
- · Drill pattern number
- Carcase colour number
- Plinth height and colour
- (if not specified, the standard plinth height of 150 mm will be supplied)
- · Worktop design / décor
- Worktop edge design / edge colour
- Worktop sketch with dimensions and indication of tongue and groove joints
- Design of the worktop outer corner (for APD): square or round
- Upright / top shelf design including the colour number and upright thickness / Upright panel floor seal colour
- Shelf colours
- · Glass design and / or colour
- Roll-up front colour
- Cornice profile / light pelmet profile including colour for each
- Order number and / or abbreviation
- Manufacturer information and built-in appliance model identification
- Kitchen block number (for kitchen block orders)
- Layout sketch with dimension information in 1:20 ratio
- Please draw / write any special productions in the centre of the layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe.

The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black. If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.



The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

carcase height

- + plinth height
- 8 mm interior chamfering of the floor profile
- = material height

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 or 200 mm Plinth height:

Base units



Base unit

1 continuous door,

1 shelf

UD 20/30/40/45/50/60 cm



Base unit

1 pinned door.

1 shelf

U 20/30/40/45/50/60 cm



Base unit

2 continuous doors.

1 shelf





Base unit

2 pinned doors,

1 shelf

U 80/90/100/120 cm



Base unit

1 drawer,

1 door. 1 shelf

US 30/40/45/50/60 cm



Base unit

2 drawers.

2 doors,

1 shelf

US 80/90/100/120 cm



Base unit

1 drawer

2 doors.

1 shelf

USG 80/90/100/120 cm



Pull-out unit

1 drawer

2 pull-outs

UA 30/40/45/50/60/80/90/100/120 cm



Drawer unit

3 drawers, 1 pull-out

U3SA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit

1 pull-out,

1 continuous front,

2 hanging baskets with wooden bottoms

UAMD 20/30 cm



Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR 15/20/30/40/45/50/60 cm

Corner base units



Corner base unit

2 continuous doors, opening angle: 165°, 1 shelf

UDTE 80/90 cm



Corner base unit

2 pinned doors, opening angle: 165°,

UTE 80/90 cm



Corner base unit as carousel unit

2 continuous fronts, carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



UEK 80/90 cm

Corner base unit as carousel unit

2 pinned fronts, carcase height: 750 mm. 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



Chamfered corner base unit

1 continuous door. 1 shelf

UED 80/90 cm



Chamfered corner base unit

1 pinned door 1 shelf

UE 80/90 cm

Half corner base units



UED90-40 HFD90-45 UED100-50 UED100-60

Corner base unit

1 continuous door,

1 shelf.

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm

*100-60: ... 1250 (1230 - 1350) mm



UE90-40 UE90-45 UE100-50 UF100-60

Corner base unit

1 drawer 1 door,

1 shelf,

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UFDSA90-45 UEDSA100-50 UEDSA100-60

Corner unit with swivel pull-out

1 continuous door. 2 tablar shelves with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm

*100-60: ... 1250 (1230 - 1350) mm



UESA100-50

UESA100-60

Corner unit with swivel pull-out 1 drawer,

1 door,

2 wooden swivel tablars with metal railing, height adjustable.

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1300 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UESAV90-45 UESAV100-50 UESAV100-60

Corner unit with swivel pull-out 1 pinned door,

2 tablar shelves with metal railing, height adjustable. 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



Surcharge for dishwasher recessed filler on fillers and half-corner

units, side panel made of carcase material. carcase depth: 561 mm


MP-GS

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 oder 200 mm Plinth height:

Angle fillers



Angle filler

Continuous front material, 70 x 70 mm, planning dimensions: 650 x 650 mm

as above, however variable from 50 to 170 mm, planning dimensions: 630 - 750 mm 1st dimension = left / 2nd dimension = right



Surcharge for dishwasher recessed filler

on fillers and half-corner units, side panel made of carcase material. carcase depth: 561 mm

Fillers / Panelling



Filler

Carcase material, 720 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm

UPK 10/20 cm



Front filler

Continuous front material. width: 200 mm



RK-72




RKS-72

Base unit back panel

16 mm thick, 720 mm high. width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1,

Vario clip fastening, in case of reproduction finishes vertical wood grain



940 mm

including floor profile: 70 mm plinth height: 100 mm plinth height: 150 mm plinth height: 890 mm 200 mm plinth height:

Available floor profile colours:

010 Black 014 Stainless steel appearance



Base unit back panel

1 continuous front design, 720 mm high, Vario clip fastening, without drill hole

RFD-72

30/40/45/50/60/80/90 cm

Cooker housing



Cooker housing

1 fixed panel, side sections: 177 mm deep, aperture dimension: 591 mm

HU 60 cm



Cooker housing

1 fixed panel, aperture dimension: 598 mm

HUB 60 cm



Cooker housing

1 plastic drawer. 16 I capacity, interior dimensions: 485 x 480 x 68 mm, aperture dimension: 598 mm



Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm, aperture dimension: 598 mm

Hot plate units



Hot plate unit

1 internal panel, 1 construction shelf for heat insulation. 1 door, 1 shelf





Hot plate unit

1 fixed panel. 1 construction shelf for heat insulation,

1 door 1 shelf

1 shelf

141 573

Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 1 door,

KS60 60 cm

K60 60 cm

Hot plate unit



1 spacer shelf for hot plate, 2 pull-outs

KS2A

141

285

285

60/80/90/100/120 cm



Hot plate unit

1 internal panel. 1 construction shelf for heat insulation, 2 pull-outs

KD2A

60/80/90/100/120 cm

Sink units



Sink base unit

1 internal panel, 1 continuous door

SPUD 40/45/50/60 cm



Sink base unit

1 fixed panel, 1 door

SPU 40/45/50/60 cm



Sink base unit

2 internal panels, 2 continuous doors

SPUD 80/90/100/120 cm



Sink base unit

2 fixed panels, 2 doors

SPU 80/90/100/120 cm



SPUAD 40/45/50/60 cm

Sink base unit 1 internal panel,

1 continuous front with centred handle, without pull-out rails and drill holes



Sink base unit

1 fixed panel. 1 front with centred handle, without pull-out rails and drill holes

SPUA 40/45/50/60 cm



SPUDA-ASK 45/50/60 cm



Sink base unit Separato-K

1 internal panel, 1 pull-out, 500 mm deep, with waste separation system Separato-K

with pull-out lid, 1 x 18 and 2 x 8 litres. 500 mm width: with 1 side organiser.

600 mm width: with 2 side organisers, 1 bio lid (for all widths)

Doors for integrated appliances



for integrated dishwashers, without handle

GSB 45/60 cm



Continuous door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs



GSBD*-I 45/60 cm

Pinned door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs

GSB*-I 45/60 cm

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Base units



XL Base unit 1 continuous door,

2 shelves

UD*-X 20/30/40/45/50/60 cm



XL Base unit

1 pinned door. 2 shelves

U*-X 20/30/40/45/50/60 cm



XL Base unit

2 continuous doors. 2 shelves

UD*-X 80/90/100/120 cm



XL Base unit

2 pinned doors, 2 shelves

U*-X 80/90/100/120 cm



XL Base unit

1 drawer,

1 door

1 shelf

US*-X 30/40/45/50/60 cm



US*-X 80/90/100/120 cm

XI Base unit

2 drawers.

2 doors,

1 shelf



XL Base unit

1 drawer,

2 doors,

1 shelf

USG*-X 80/90/100/120 cm



XL Pull-out unit

1 drawer

2 pull-outs

UA*-X 30/40/45/50/60/80/90/100/120 cm



XL Drawer unit

3 drawers, 1 pull-out

U3SA*-X 30/40/45/50/60/80/90/100/120 cm



XL Pull-out unit

1 pull-out,

1 continuous front.

2 hanging baskets with wooden bottoms

UAMD*-X 20/30 cm



XL Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR*-X 15/20/30/40/45/50/60 cm

XL Corner base units



XL Corner base unit

2 continuous doors, opening angle: 165°, 2 shelves

UDTE*-X 80/90 cm



XL Corner base unit

2 pinned doors, opening angle: 165°, 2 shelves

UTE*-X 80/90 cm



XL Corner base unit as carousel unit

2 continuous fronts. Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Corner base unit as carousel unit

2 pinned fronts, Unit height: 822 mm. 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Chamfered corner base

1 continuous door, 2 shelves

UED*-X 80/90 cm



XL Chamfered corner base unit

1 pinned door, 2 shelves

UE*-X 80/90 cm

XL Half-corner units



UED90-40-X UED90-45-X UED100-50-X UED100-60-X

XL Corner base unit

1 continuous door,

2 shelves.

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UE90-40-X UE90-45-X UE100-50-X LIF100-60-X

XL Corner base unit

1 drawer,

1 door,

1 shelf. 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UEDSA90-45-X UEDSA100-50-X UEDSA100-60-X

XL Corner unit with swivel pull-out 1 continuous door

2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm

*100-60: ... 1250 (1230 - 1350) mm



UESA90-45-X UESA100-50-X UESA100-60-X

XL Corner unit with swivel pull-out 1 drawer,

1 door,

2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1300 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UESAV90-45-X UESAV100-50-X UESAV100-60-X

XL Corner unit with swivel pull-out

1 pinned door, 2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



Surcharge for recessed fillers

for fillers and half corner units, side section of carcase material in carcase height carcase depth: 561 mm

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm


70, 100, 150 or 200 mm Plinth height:

XL Angle fillers



XL Angle filler Continuous front material, 70 x 70 mm, Planning dimensions: 650 x 650 mm

as above however variable from 50 to 170 mm, Planning dimensions: 630 - 750 mm 1st dimension = left 2nd dimension = right



Surcharge for recessed fillers

for fillers and half corner units, side section of carcase material, in carcase height, carcase depth: 561 mm

XL Fillers / Panelling



XL Filler

Carcase material, 792 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm

UPK*-X 10/20 cm



XL Front filler

Continuous front material. width: 200 mm

UPD*-X 20 cm



XL Base unit back panel 16 mm thick,

792 mm high, width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1, Vario clip fastening,

in case of reproduction finishes vertical wood grain



as above, however, continuous height, including floor profile:

70 mm plinth height: 882 mm 100 mm plinth height: 912 mm 150 mm plinth height: 962 mm

200 mm plinth height: 1012 mm

Available floor profile colours: 010 Black

014 Stainless steel appearance



XL Base unit back panel 1 continuous front, 789 mm high, Vario clip fastening, without drill holes

XL Cooker housings



XL Cooker housing

1 fixed panel, aperture dimension: 595 mm



XL Cooker housing

1 plastic drawer, 16 I capacity, interior dimensions: 485 x 480 x 68 mm aperture dimension: 595 mm



XL Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm. aperture dimension: 595 mm

XL Hot plate units



XL Hot plate unit

1 internal panel, 1 construction shelf for heat insulation

1 door,

2 shelves



XL Hot plate unit

1 fixed panel, 1 construction shelf for heat insulation.

1 door,

1 shelf



KS60-X 60 cm

XL Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 1 door,

1 shelf



XL Hot plate unit

1 drawer.

1 spacer shelf for hot plate, 2 pull-outs

KS2A*-X 60/80/90/100/120 cm

XL-Doors for integrated appliances



Continuous XL door for fully integrated

dishwashers built-under fridge and freezer units with pull-outs, includes spacer strip



GSB*-I-X 45/60 cm

Pinned XL door for fully integrated

dishwashers, built-under fridge and freezer units with pull-outs. includes spacer strip

XL Sink base units



XL Sink base unit

1 internal panel, 1 continuous door

SPUD*-X 40/45/50/60 cm



XL Sink base unit

1 fixed panel, 1 door

SPU*-X 40/45/50/60 cm



XI Sink base unit

2 internal panels, 2 continuous doors

SPUD*-X 80/90/100/120 cm



XL Sink base unit 2 fixed panels, 2 doors

SPU*-X 80/90/100/120 cm



XL Sink base unit

1 internal panel, 1 continuous front with centred handle, without pull-out rails and drill holes



XL Sink base unit

1 fixed panel 1 front with centred handle, without pull-out rails and drill holes

SPUA*-X 40/45/50/60 cm



18L

8L | 8L

45/50/60 cm

XL Sink unit Separato-K 1 internal panel,

1 pull-out, 500 mm deep, with waste separation system

Separato-K with pull-out lid, 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers,

1 bio lid (for all widths)



XL Sink unit Separato-K 1 fixed panel.

1 pull-out, 500 mm deep, with waste separation system Separato-K with pull-out lid,

1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser. 600 mm width: with 2 side organisers. 1 bio lid (for all widths)

Worktops | Niche cladding

Worktops



60/70/80/90/100/ 110/120 cm

Worktop APN with N-edge

rounded front edge, sides sealed with straight décor edge. Price per running 100 mm, every 100 mm started will be invoiced.
Maximum 5100 mm wide. Please quote the décor number in your order.



APD 60/70/80/90/100/ 110/117 cm

Worktop APD

with décor edge front and side edges coated with straight décor edging material, 1.5 mm thick. Price per running 100 mm, every 100 mm started will be invoiced. Maximum 5100 mm wide. Please quote the décor and edge colour number in your

Worktop processing



Surcharge for exterior and interior roundings deviating from the standard radii on worktops



APN-A APN-AS APD-A

Surcharge for chamfered cuts

on worktops and tables. including edging



AP-NF

Tongue and groove joint for worktop corners or

extensions, incl. screw fittings, tongues and water resistant glue



Cut-outs for built in hobs, sinks or ventilation grills

AP-AUS



Surcharge for inner corners in square design on worktops and tables with décor edge

Niche cladding



NV 54 NV 70

Niche cladding coated on both faces, 16 mm thick. horizontal structure (except 226 Metal art décor and 274 Teramo marble reproduction)

with edge on all sides, width: 250 - 2580 mm heights: NV54 for niches beneath

wall units NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above, however with deviating dimensions acc. to sketch max. 2580 mm wide, 2030 mm high, 1st dimension in direction of grain coated edge all round. Minimum price: 0.5 m², minimum dimensions: 250 x 200 mm. invoiced per m².

Accessories for niche cladding



NPUK 500

Plastic cover profile in translucent appearance for niche or back panel cladding, 16 mm thick, self-adhesive, 5000 mm long



WAPN 200/400/500 cm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep. delivered as strand

material.

Available in:

014 Stainless steel appearance, 010 Black



WAPN-7

WAPN accessory bag

matches the plastic upstands WAPN consisting of:

4 x interior corner 90° /

2 x interior corner 135°

2 x exterior corner 90° 2 x set of end caps for WAPN

2 x set of end caps for niche cladding

Available in:

014 Stainless steel appearance, 010 Black



NKPU 200 / 400

Aluminium profile, 2-piece with sealing profile for niche and back panel cladding or as upstand,

dimensions: 17 mm high, 20 mm deep

Available in:

014 Stainless steel appearance, 010 Black



NKPO 200 / 400

Niche profile on top aluminium profile, stainless steel appearance for niche cladding incl. 1 set of end caps (left / right), dimensions:

16 mm high, 16 mm deep



NKP-Z

NKP accessory bag matches upstand NKPU

Available in:

014 Stainless steel appearance, 010 Black



NKP-EK

1 set of end caps matching aluminium profile for niche cladding NKPO

Upright panels | Top shelves | Wall shelf units

Upright panels for base units



Upright at end of run incl. floor profile in 014 Stainless steel appearance or 010 Black. depth: 583 mm

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm



Upright for room designs depth: 250 to 1166 mm, edged on both sides, incl. floor profile in 014 Stainless steel appearance or 010 Black

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm

XL Upright panels for base units



XL Upright at end of run incl. floor seal in 014 Stainless steel appearance or 010 Black. depth: 583 mm

UWA*-X 10/16/25/50 mm Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm

XL Upright for room designs

depth: 250 to 1166 mm,

edged on both sides,

incl. floor seal in

appearance or

010 Black

014 Stainless steel



UWR*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm

Wall shelf units



WB25 30/40/45/50/55/ 60/65/70/80/90/ 100/110/120 cm

Plug-in wall shelf, 25 mm thick Carcase material, polymer edging all around, 255 mm deep, incl. metal plug fitting



VB16 100 cm

Wall shelf unit with shelf holders, 16 mm thick 255 mm deep. polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VR16 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance



VB25 100 cm

Wall shelf unit with shelf holders, 25 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm. includes 2 shelf holders VBH5

VB25 258 cm

Wall shelf unit with shelf holders as above however available in widths from 1001 mm to 2580 mm, includes 4 shelf holders

Available shelf holder colours: 010 Black 014 Stainless steel appearance



VB50 100 cm

Wall shelf unit with shelf holders, 50 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB50 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance

Upright panels for wall units



Upright at end of run / intermediate upright for wall units, height 1 depth: 372 mm, height: 720 mm

WW 10/16/25/50 mm -1



Upright at end of run / intermediate upright for wall units, height 2 depth: 372 mm, height: 792 mm

WW 10/16/25/50 mm -2



Upright at end of run / intermediate upright for wall units, height 3 depth: 372 mm, height: 864 mm

WW 10/16/25/50 mm -3

Top shelves



Top shelf, 10 mm thick, for side- or highboard coated on both faces. polymer edged on front and sides, length: 250 - 2580 mm


ADB16 38/59/117 cm

Top shelf, 16 mm thick. for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm



ADB25 38/59/117 cm

Top shelf. 25 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides. length: 250 - 2580 mm



Top shelf, 50 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides length: 250 - 2580 mm

Highboards - 1582 / 1612 / 1662 / 1712 mm high

Carcase depth: 561 mm Carcase height: 1512 mm

Plinth height: 70, 100, 150 oder 200 mm

XL Highboards - 1654 / 1684 / 1734 / 1784 mm high

Carcase depth: 561 mm Carcase height: 1584 mm

Plinth height: 70, 100, 150 oder 200 mm



Highboards



Highboard

- 2 doors 1 fixed shelf. 3 shelves
- H 30/40/50/60 cm

XL Highboards



XL Highboard



H*-X 30/40/50/60 cm

Housing for ovens



Oven housing

aperture height: 590 mm

- 1 fixed compensation panel,
- 1 drawer,
- 1 pinned door,
- 1 shelf

XL Housing for ovens



XL Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 1 drawer,
- 1 door,
- 2 shelves

Integrated appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm 1 appliance door,

2 pull-outs

XL Integrated appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm 1 appliance door,

2 pull-outs

Integrated appliance housings with aperture height up to 1230 mm



G123S

Appliance housing for integrated fridge aperture height: 1230 mm

- 1 internal panel,
- 1 appliance door
- 1 drawer

XL Integrated appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 internal panel, 1 appliance door
- 1 pull-out

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 internal panel,
- 2 appliance doors

G145

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 2 appliance doors

XL Fillers

G145-X

Fillers



Carcase material. 1512 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK 20 cm



XL Filler

Carcase material. 1584 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-X 20 cm

Tall units, height 1 - 2086 / 2116 / 2166 / 2216 mm high

Carcase depth: 561 mm Carcase height: 2016 mm

Plinth height: 70, 100, 150 oder 200 mm

Tall units


501 933 573

Pantry unit

- 3 doors, 2 fixed shelves.
- 4 shelves
- H*-1 30/40/50/60 cm



HDV*-1 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-1 30/40 cm



Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro. 5 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1 30/40 cm

HB*-1 40/50/60 cm

501

933

573



Broom cupboard

- 1 door.
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door, 1 system grid,
- 2 baskets for cleaning materials,
- 1 system shelf.
- 1 hose rack for vacuum cleaner.
- 2 pegboards



Tall unit

- 1 door.
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door, 5 internal pull-outs

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm 2 doors.

- 1 fixed compensation panel 2 shelves

GO-1



Oven housing aperture height: 590 mm 2 doors

- 1 fixed compensation panel,
- 1 drawer. 2 shelves



Oven housing aperture height: 590 mm

- 1 door. 1 shelf.
- 1 fixed compensation panel, 1 drawer,
 - 2 pull-outs

GOS2A-1



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 1 door

- shelf
- 1 fixed compensation panel,
- 1 pull-out



573

GLO-1

Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 flan
- 1 lifting door,
- 1 fixed compensation panel,
- 1 door
- 1 shelf

357 429 VAR 285 285

GLO2A-1

Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 1 flap.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors,
- 1 appliance door.
- 2 shelves

G88-1



Appliance housing for integrated fridge aperture height: 880 mm

- 1 flan
- 1 door
- 1 appliance door,
- 1 shelf

501

933 285

285



Appliance housing for integrated fridge aperture height: 880 mm

- 1 door, 1 shelf,
- 1 appliance door,
- 2 pull-outs

G88A-1

Appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door. 1 shelf

G123-1



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 internal panel.
- 1 appliance door,
- 1 pull-out

G123A-1



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door for freezer compartment.
- 1 appliance door for

Tall units, height 1 - 2086 / 2116 / 2166 / 2216 mm high


Carcase depth: 561 mm Carcase height: 2016 mm

Plinth height: 70, 100, 150 oder 200 mm


Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 appliance door for freezer compartment, 1 appliance door for fridge section, 1 pull-out



Fillers / Cladding



Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-1



Tall units in XL height, height 1 XL - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm Carcase height: 2088 mm

Plinth height: 70, 100, 150 oder 200 mm

XL Tall units

501 933 645

XL Pantry unit

- 3 doors, 2 fixed shelves.
- 4 shelves
- H*-1X 30/40/50/60 cm



XL Pantry unit 2 doors,

- 1 fixed shelf.
- 5 shelves

HDV*-1X 30/40/50/60 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1X 30/40 cm



HB*-1X 40/50/60 cm

XL Broom cupboard

- 1 door.
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials.
- 1 system shelf.
- 1 hose rack for vacuum cleaner.
- 2 pegboards



XL Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door.
- 5 internal pull-outs

HI*-1X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 3 shelves

GO-1X



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel.
- 1 drawer
- 2 shelves

GOS-1X



XL Oven housing aperture height: 590 mm

- 1 door.
- 1 shelf.
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-1X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door 1 shelf
- 1 fixed compensation panel,
- 1 pull-out

GMO-1X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 flap,
- 1 lifting door,
- 1 fixed compensation panel,
- 1 door,
- 1 shelf



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 1 flap.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors,
- 1 appliance door.
- 2 shelves

G88-1X



XL Appliance housing for integrated fridge aperture height: 880 mm

- flap.
- 1 appliance door,
- 1 door
- 2 shelves





XL Appliance housing for integrated fridge aperture height: 880 mm 1 door,

- 1 shelf.
- 1 appliance door,
- 2 pull-outs

G88A-1X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door,
- 1 shelf

G123-1X



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door.
- 1 internal panel,
- 1 appliance door,
- 1 pull-out

G123A-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door for freezer compartment.
- 1 appliance door for fridge section

Tall units in XL height, height 1 XL - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm

Carcase height: 2088 mm

Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf.
- 1 internal panel, 2 appliance doors
- G145-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 appliance door for freezer compartment,
1 appliance door for fridge section,


1 pull-out

XL Fillers / Cladding



XL Filler Carcase material, 2088 mm high, U-shaped seal for connection to wall. width: 230 mm

HPK20-1X 20 cm



XL Front filler Continuous front material, width: 200 mm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-1X





Tall units, height 2 - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm Carcase height: 2088 mm

Plinth height: 70, 100, 150 oder 200 mm

Tall units

573 933 573

Pantry unit

- 3 doors,
- 2 fixed shelves.
- 4 shelves


H*-2 30/40/50/60 cm



Pantry unit


- 2 doors.
- 1 fixed shelf.
- 4 shelves

HDV*-2 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-2 30/40 cm



Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2 30/40 cm



Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards

Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 5 internal pull-outs

HI*-2 40/50/60 cm

573

933

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 2 shelves

GO-2



Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer.
- 2 shelves

GOS-2



Oven housing aperture height: 590 mm

- 1 door. 1 shelf
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-2



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 1 door

- 1 shelf
- 1 fixed compensation panel,
- 1 pull-out

GMO-2

GLO-2



Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 2 doors, 1 lifting door,
- - 1 fixed compensation panel,
 - 1 shelf



Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door,
- 1 lifting door,
- 1 fixed compensation panel, 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 2 shelves

G88-2



Appliance housing for integrated fridge aperture height: 880 mm 2 doors.

- 1 appliance door,
- 1 shelf

GD88-2

573

933 285

285



Appliance housing for integrated fridge aperture height: 880 mm

- 1 door
- 1 shelf.
- 1 appliance door,
- 2 pull-outs

G88A-2

Appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door 1 shelf

501

Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel
- 1 appliance door.
- 1 pull-out

G123A-2

G123-2



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door.
- 1 shelf.
- 1 internal panel,
- 1 appliance door for
- freezer compartment,
- 1 appliance door for fridge section

Tall units, height 2 - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm

429 933 717

Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors

GD145-2



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 2 appliance doors,


G145-2

Fillers / Cladding



Filler Carcase material, 2088 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-2 20 cm



Front filler Continuous front material, width: 200 mm

HPD20-2 20 cm

Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

2 appliance doors

GD178-2



Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm

Plinth height: 70, 100, 150 oder 200 mm



XL Tall units

573 933 645

XL Pantry unit


- 3 doors. 2 fixed shelves.
- 4 shelves
- H*-2X 30/40/50/60 cm



XL Pantry unit 2 doors.


- 1 fixed shelf.
- 5 shelves

HDV*-2X 30/40/50/60 cm



XL Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-2X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2X 30/40 cm



XL Broom cupboard

- 1 door
- 1 fixed shelf,
- 1 shelf, 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards



XL Tall unit

- 1 door.
- 1 fixed shelf,
- 1 shelf.
- 1 lug connected door,
- 5 internal pull-outs

HI*-2X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 3 shelves

GO-2X



XL Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer
- 2 shelves

GOS-2X



XL Oven housing aperture height: 590 mm

- 1 door.
- 1 shelf
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-2X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 1 door

- 1 fixed compensation panel,
- 2 pull-outs

GMO2A-2X

GLO-2X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

aperture height: 590 mm 2 doors,

- 1 lifting door,
- 1 fixed compensation panel,
- 1 shelf



GLO2A-2X

XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door,
 - 1 lifting door,
 - 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 2 shelves

G88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 2 shelves

GD88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 door 1 shelf
- 1 appliance door,
- 2 pull-outs

G88A-2X

XL Appliance housings with aperture height up to 1230 mm



- XL Appliance housing for integrated fridge aperture height: 1230 mm
- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door
- 1 shelf
- G123-2X

501 1293

XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel
- 1 appliance door.
- 1 pull-out

G123A-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door
- 1 shelf,
- 1 internal panel,
- 1 appliance door for
- freezer compartment, 1 appliance door for

Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm Carcase height: 2160 mm

Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors

GD145-2X




XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 2 appliance doors

G145-2X

XL Fillers / Cladding



XL Filler Carcase material, 2160 mm high, U-shaped seal for connection to wall, width: 230 mm



XL Front filler Continuous front material, width: 200 mm

HPD20-2X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1780 mm

2 appliance doors

GD178-2X





Tall units, height 3 - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm Carcase height: 2160 mm

Plinth height: 70, 100, 150 oder 200 mm

Tall units

645 933 573

Pantry unit


- 3 doors, 2 fixed shelves.
- 4 shelves
- H*-3 30/40/50/60 cm



Pantry unit


- 2 doors.
- 1 fixed shelf.
- 4 shelves

HDV*-3 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-3 30/40 cm



Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-3 30/40 cm



Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards



Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 5 internal pull-outs

HI*-3 40/50/60 cm

645

933

573

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 3 shelves

GO-3



Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer.
- 3 shelves

GOS-3



Oven housing aperture height: 590 mm

- 1 door. 2 shelves.
- 1 fixed compensation panel, 1 drawer.
- 2 pull-outs

GOS2A-3



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 1 door

- 1 shelf
- 1 fixed compensation panel, 1 pull-out

GMO-3



Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 2 doors.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 shelves



GLO2A-3

Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door. 1 shelf.
- 1 lifting door,
- 1 fixed compensation panel, 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 2 shelves

G88-3



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 2 shelves

GD88-3



Appliance housing for integrated fridge aperture height: 880 mm

- 1 door 1 shelf
- 1 appliance door,
- 2 pull-outs

G88A-3

Appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door
- 1 shelf

573

Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel
- 1 appliance door.
- 1 pull-out

G123A-3



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door.
- 2 shelves,
- 1 internal panel,
- 1 appliance door for
- freezer compartment, 1 appliance door for
- fridge section

Tall units, height 3 - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm

<u>501</u> 933 717

Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf.
- 1 internal panel, 2 appliance doors

GD145-3



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 2 appliance doors,

G145-3

HPK20-3 20 cm



Front filler

Fillers / Cladding

Filler

Carcase material, 2160 mm high, U-shaped seal for

connection to wall,

width: 230 mm

Continuous front material, width: 200 mm

HPD20-3 20 cm

Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

2 appliance doors

GD178-3



Tall units in XL height, height 3 XL - 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm

Carcase height: 2232 mm

Plinth height: 70, 100, 150 oder 200 mm

XL Tall units

645 933

XL Pantry unit


- 3 doors.
- 2 fixed shelves. 4 shelves
- 645 H*-3X 30/40/50/60 cm



XL Pantry unit

- 2 doors. 1 fixed shelf.
- 5 shelves

HDV*-3X 30/40/50/60 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable, 1 fixed shelf



1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with

XL Larder unit

wooden bottoms and metal railing, adjustable, 1 fixed shelf



HB*-3X 40/50/60 cm

XL Broom cupboard

- 1 door
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid, 2 baskets for cleaning
- materials.
- 1 system shelf
- 1 hose rack for vacuum cleaner
- 2 pegboards



XL Tall unit

- 1 door,
- 1 fixed shelf.
- 1 shelf
- 1 lug connected door.
- 5 internal pull-outs

HI*-3X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 4 shelves

GO-3X



XL Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer
- 3 shelves

GOS-3X



XL Oven housing aperture height: 590 mm

- 1 door. 2 shelves.
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-3X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 1 door

- 1 shelf
- 1 fixed compensation panel,
- 1 pull-out

GMO-3X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

aperture height: 590 mm

- 2 doors
- 1 lifting door,
- 1 fixed compensation panel,
- 2 shelves



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door.
- 1 shelf. 1 lifting door,
- 1 fixed compensation panel, 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 2 shelves

G88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door.
- 3 shelves

GD88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 door 1 shelf
- 1 appliance door,
- 2 pull-outs

G88A-3X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel,
- 1 appliance door, 1 door
- 1 shelf



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door.
- 1 pull-out

G123A-3X

G123-3X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door.
- 2 shelves,
- 1 internal panel,
- 1 appliance door for freezer compartment,
- 1 appliance door for
- fridge section

Tall units in XL height, height 3 XL - 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm Carcase height: 2232 mm

Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf.
- 1 internal panel,
- 2 appliance doors


645

XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 2 appliance doors,

G145-3X

XL Fillers / Cladding



XL Filler Carcase material, 2232 mm high, U-shaped seal for connection to wall. width: 230 mm

2229

XL Front filler Continuous front material, width: 200 mm

HPD20-3X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-3X



Wall units 360 mm high

Carcase depth: 350 mm Carcase height: 360 mm

Wall units 360 mm high



Wall unit

1 door

1 flap.

W*-36 45/50/60 cm



WK*-36 45/50/60/80/90/100/ 120 cm



WKG*-36 50/60/80/90/100/ 120 cm

Wall unit with framed glass flap door 1 framed glass flap door,

Wall unit with flap door

opening angle 107°

clear glass No. 01, opening angle 107°, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different

No. 02 Matt glass

glass choice for glass variants:

No. 39 Black glass

Wall units 360 mm high



WKSQ*-36 50/60/80/90/100/ 120 cm

Wall unit with glass doors Square

1 aluminium framed flap, opening angle 107°, handleless version with wall unit bottom shelf with attached profile strip in stainless steel appearance

Available in:

No. 321 Aluminium framed front in stainless steel appearance with 02 Matt glass No. 308 Aluminium framed front in stainless steel appearance with 035 Grey glass No. 329 Aluminium framed front in Black with 39 Black glass

Fillers



Filler

Carcase material, 360 mm high, U-shaped seal for connection to wall. width: 100 mm / 200 mm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep. width: 200 mm

WPD20-36 20 cm

Wall units 576 mm high

Carcase depth: 350 mm Carcase height: 576 mm

Wall units 576 mm high



Wall unit

1 door 1 shelf

W*-58

20/30/35/40/45/50/60 cm



Wall unit

1 folding door with slide mechanism, 1 shelf

WFT60-58 60 cm



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-58 50/60 cm

Wall units 576 mm high



Corner wall unit

1 door. 1 angle filler, 1 shelf

WF60-20-58 WE80-35-58 WE90-45-58 Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ... WE60-20: ...650 (630 - 700) mm

WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 1 fixed shelf. side depth: 371 mm

WR*-58 15/20/30/40/45/50/60 cm

Wall units 576 mm high



Wall unit as bottle rack 3 fixed shelves, side depth: 371 mm

WRF15-58 15 cm

Fillers



Filler

Carcase material, 576 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm

10/20 cm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep. width: 200 mm

WPD20-58

20 cm

Wall units, height 1 - 720 mm high

Carcase depth: 350 mm Carcase height: 720 mm

Wall units 720 mm high



Wall unit

1 door, 2 shelves

W*-1

20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors. 2 shelves

W2T-1 60 cm W*-1 80/90/100 cm



Wall unit

2 doors hinged parallel. 2 shelves



WFT60-1

45/50/60 cm

60 cm

80/90/100 cm

Wall unit

1 folding door with slide mechanism, 2 shelves



Wall unit. framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-1 90/100 cm Wall unit. framed glass door

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-1 45/50/60 cm Wall unit, segmented glass door

1 door. clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39

Wall units 720 mm high



WGLS*-1 90/100 cm Wall unit, segmented glass door 2 doors,

clear glass No. 01, 2 glass shelves. glass variants against surcharge: no. 02 / 39

No image MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass



WFL*-1

WFLG*-1

50/60 cm

Wall unit, folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

50/60/80/90/100/120 cm



50/60/80/90/100/120 cm

1 folding/lifting door, 1 top original front,

1 bottom framed glass front, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

Wall unit, folding/lifting door



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves. Planning dimensions: 650 x 650 mm



60/65/80/90 cm

Corner wall unit 2 doors with 165° hinges, 2 shelves, hinged side = first door to be opened

Wall units 720 mm high



WE90-45-1

Corner wall unit

1 door, 1 angle filler, 2 shelves Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ... WE60-20: ...650 (630 - 700) mm

WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit

2 fixed shelves. side depth: 371 mm

WR*-1 15/20/30/40/45/50/60 cm



Wall unit as bottle rack

4 fixed shelves. side depth: 371 mm





Filler

Carcase material 720 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm



20 cm


Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

Wall units, height 2 - 792 mm high

Carcase depth: 350 mm Carcase height: 792 mm

Wall units 792 mm high



Wall unit

1 door, 2 shelves

W*-2 20/25/30/35/40/45/50/55/60 cm



Wall unit 2 doors. 2 shelves

W2T*-2 60 cm W*-2 80/90/100 cm



Wall unit

2 doors hinged parallel. 2 shelves

W2TP*-2 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-2 60 cm

WG*-2

45/50/60 cm



Wall unit, framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-2 90/100 cm Wall unit, framed glass door

2 doors, clear glass No. 01, 2 glass shelves. glass variants against surcharge: no. 02 / 39



Wall unit, segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-2 90/100 cm

WGI S*-2

45/50/60 cm

Wall unit. segmented glass door 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 792 mm high



Wall unit for microwave 1 aperture depending

on appliance height, 1 flap as niche compensation

WM*-2 50/60 cm



Corner wall unit. diagonal

1 door: 394 mm wide. opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



Corner wall unit

2 doors with 165° hinges, 2 shelves. hinged side = first door to be opened

WE*-2 60/65/80/90 cm



Corner wall unit

1 door, 1 angle filler, 2 shelves Carcase widths: 600, 782, 882 mm

Planning dimensions

WE60-20-2 WE80-35-2 WE90-45-2

(variable): 450 (390 - 500) x . WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 2 fixed shelves, side depth: 371 mm






Wall unit as bottle rack 4 fixed shelves, side depth: 371 mm

15 cm

Wall units 792 mm high



Wall unit, folding/lifting door 1 folding/lifting door,

2 original fronts, 2 shelves

WFI *-2 50/60/80/90/100/120 cm



Wall unit, folding/lifting door

1 folding/lifting door, 1 top original front. 1 bottom framed glass front, clear glass No. 01, 2 glass shelves, glass variants against 50/60/80/90/100/120 cm surcharge: no. 02 / 39

Fillers



WFLG*-2

Filler

Carcase material, 792 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm

10/20 cm



Front filler Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep,

width: 200 mm

Wall units, height 3 - 864 mm high

Carcase depth: 350 mm Carcase height: 864 mm

Wall units 864 mm high



Wall unit

1 door, 2 shelves

W*-3 20/25/30/35/40/45/50/55/60 cm



Wall unit 2 doors. 2 shelves

W2T*-3 60 cm W*-3 80/90/100 cm



Wall unit

2 doors hinged parallel. 2 shelves

W2TP*-3 80/90/100 cm



Wall unit

1 folding door with slide mechanism. 2 shelves

WFT60-3 60 cm



WG*-3 45/50/60 cm

Wall unit, framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-3 90/100 cm Wall unit, framed glass door 2 doors,

clear glass No. 01, 2 glass shelves. glass variants against surcharge: no. 02 / 39



WGLS*-3 45/50/60 cm Wall unit, segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-3 90/100 cm Wall unit. segmented glass door

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 864 mm high



WM*-3

50/60 cm

WED65-3

Wall unit for microwave 1 aperture depending on appliance height, 1 door as niche compensation,

1 shelf

861

Corner wall unit. diagonal

1 door: 394 mm wide. opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



Corner wall unit

2 doors with 165° hinges, 2 shelves. hinged side = first door to be opened

WE*-3 60/65/80/90 cm



Corner wall unit

1 door. 1 angle filler. 2 shelves Carcase widths: 600, 782, 882 mm

WE60-20-3 WE80-35-3 WE90-45-3

Planning dimensions (variable): 450 (390 - 500) x . WE60-20: ...650 (630 - 700) mm

WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 2 fixed shelves, side depth: 371 mm

WR*-3 15/20/30/40/45/50/60 cm



Wall unit as bottle rack 5 fixed shelves, side depth: 371 mm. width: 150 mm

WRF15-3 15 cm

Wall units for cooker hoods

Wall units for cooker hoods



Wall unit for slimline cooker hoods internal panel, metal grids,

80 mm deep. the number of metal grids depends on the built-in dimensions of the cooker hood

WDAF60-58 60 cm

height: 576 mm

WDAF60-1 60 cm

height: 720 mm

WDAF60-2 60 cm

height: 792 mm

WDAF60-3 60 cm

height: 864 mm

Bridging shelf




Bridging shelf in carcase material

laminated on both faces in the same colour. 16 mm thick 350 mm deep, with edging material on 3 sides, for fitting between wall units or as a window bridging. Price per running 100 mm, invoiced per started 100 mm. Width: 250 - 2580 mm

WZB60

Bridging shelf in carcase material as above. however 600 mm wide

Fillers



Filler

Carcase material, 864 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

Plastic cutlery trays and pull-out organisers




30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Trend grey, height: 43 mm, fits drawer depth of 500 mm. side depth: 561 mm



BE* -46 45/50/60/80/90/ 100/120 cm

as above, however for drawer depth 400 mm, side depth: 461 mm





BE* M 30/40/45/50/60/80/ 90/100/120 cm


Cutlery tray Move

silver-grey, with dividers for customisable divisions, height: 47 mm, fits drawer depth of 500 mm, side depth: 561 mm



BE* -46 M 30/40/45/50/60/80/ 90/100/120 cm

as above, however for drawer depth 400 mm, side depth: 461 mm





AUO 56

AUO 46

Universal organiser

Alu profile with 4 dividers for individualised divisions, height: 125 mm, fits pull-out depth of 500 mm, side depth: 561 mm,

1 alu profile of 600 mm width,

2 alu profiles of 800 up to 900 mm width, 3 alu profiles of 1000 up to 1200 mm width

Please order the correct number for the unit width!


as above, however for pull-out depth 400 mm, side depth: 461 mm



BE* C 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Concept

Non-slip soft touch surface, anthracite, height: 52 mm, fits drawer depth of 500 mm, side depth: 561 mm





AO* C 60/80/90/100/120 cm

Pull-out organisation concept

Non-slip soft touch surface, anthracite, height: 100 mm, fits pull-out depth of 500 mm, side depth: 561 mm




Plastic cutlery trays and pull-out organisers



BE* BE 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray black edition Non-slip soft touch surface, black, height: 52 mm, fits drawer depth 500 mm, side depth: 561 mm






Black ash cutlery trays and pull-out organisers




BE* N 30/40/45/50/60/80/ 90/100/120 cm



solid ash wood, stained black, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm







BE-MVGS* N 80/90/100/120 cm

Black ash wood cutlery tray with knife block, storage containers and insert for spice mills and shakers

Design in solid ash wood, stained black, incl. 5 knives, 6 storage containers, 3 spice mills, 3 shakers, height: 56 mm, fits drawer depth 500 mm, side depth: 561 mm







Universal organiser, black ash

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in ash for 600 mm width, incl. 16 solid wood partitions in ash for 800/900/1000 mm width, incl. 24 solid wood partitions in ash for 1200 mm width







60/80/90/100/120 cm

Universal organiser, black ash

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in ash for 600 mm width, incl. 10 solid wood partitions in ash for 800/900/1000 mm width, incl. 13 solid wood partitions in ash for 1200 mm width








Beech cutlery trays and pull-out organisers



Beech wood cutlery tray solid beech wood, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm

BE* H 30/40/45/50/60/80/ 90/100/120 cm





AOS* H 60/80/90/100/120 cm

Beech wood universal organiser

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm,

side depth: 561 mm,

incl. 7 solid wood partitions in beech for 600 mm width, incl. 10 solid wood partitions in beech for 800 / 900 / 1000 mm width,

incl. 13 solid wood partitions in beech for 1200 mm width

Oak cutlery trays and pull-out organisers



BEHS* E 40/45/50/60/80/90/ 100/120 cm

Oak wooden segment cutlery tray solid wood design in oak, with anti-slip mat in anthracite,

height: 55 mm, segment width: 274 mm,

fits drawer depth of 500 mm,


side depth: 561 mm,

one wooden segment is delivered up to a width of 600 mm, for widths exceeding 800 mm, two wooden segments are delivered



BEHS* -46 E 40/45/50/60/80/90/ 100/120 cm

as above, however for drawer depth 400 mm, side depth: 461 mm





60/80/90/100/120 cm

AOS* E

Universal organiser, oak

with solid wood partitions for individualised divisions,

fits pull-out depth 500 mm,

side depth: 561 mm,

incl. 7 solid wood partitions in oak for 600 mm width,

incl. 10 solid wood partitions in oak for 800 / 900 / 1000 mm width,

incl. 13 solid wood partitions in oak for 1200 mm width





Mounting sets



MONSET 1

Mounting set 1

consisting of:

- 1 ball siphon 1 ½" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut

MONSET 2

Mounting set 2

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut
- 1 hose clip, 16 25 mm
- 1 table socket, triple, sockets model F, with contact protection, white with 1500 mm supply line, 3 x 1.5 mm²

Accessories for sink units



40/45/50/60/80/90/ 100/120 cm

Moisture protection sheet

aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs. fits only for a side depth of 561 mm

FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X)

FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X)



WSMS* 40/45/50/60/80/90/ 100/120 cm

Waterproof mat

plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm

Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUL.

Upstands



WAP

200/400/500 cm

Lenath 2000 mm

Length 4000 mm

Special length 5000 mm

Plastic upstand

Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in all worktop décors, also available in:

No. 014 Stainless steel appearance



WAP-Z

WAP accessory bag

matches the plastic upstands WAPN

- 4 x interior corner 90°
- 2 x exterior corner 90°
- 2 x set of end caps



WAPN 200/400/500 cm


Length 2000 mm

Length 4000 mm

Special length 5000 mm

consisting of:

- 2 x interior corner 135°



Available in:

014 Stainless steel appearance, 010 Black

Bottom profile adds 4 mm to the worktop.



WAPN-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:


- 4 x interior corner 90° / 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps for WAPN
- 2 x set of end caps for niche cladding


Available in:


014 Stainless steel appearance, 010 Black

Dimensional drawings | Height grid


Height grid, carcase heights










Height grid, XL carcase heights









Height grid, standard and maxi door dimensions

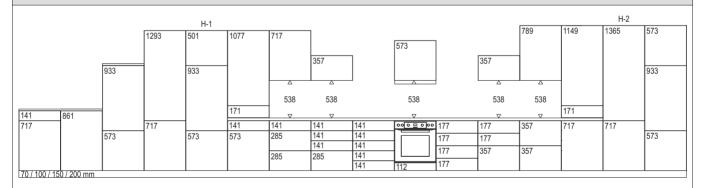




Dimensional drawings | Height grid


Height grid, XL door dimensions, Height 1

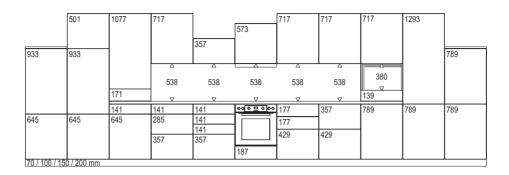


Height grid, XL door dimensions, Height 2

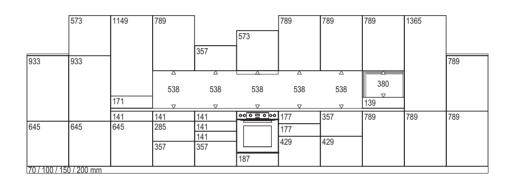

Height grid, XL door dimensions, Height 3

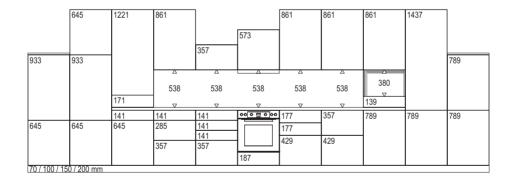

Height grid, tall units



Minimum room heights

A* B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height B* = Plinth height

Kurztypenliste 2023





ΕN